

# Pulldown Practix



Pulldown and Practix bandsaws belong to the smallest saws in our range. Thanks to their low space demands and simple operation they are suitable especially for cutting small- to medium-range materials. Their cutting performance, flexible arm swivelling, solid material design, and easy operation make these saws ideal for smaller plants with high demands on precision and quality of the cut material.


# Pulldown 160.120 G



Pulldown 160.120 G hand bandsaw is the smallest machine offered. It is suitable for smaller scale cutting in locksmith's workshops as a substitute for common chop saws. Thanks to its portability it is an ideal tool for locksmiths working on construction sites. Compared with competition, this saw excels in the cutting precision guaranteed by precise saw band guiding in bearings and especially in hardmetals.

The band arm made from an Al-alloy significantly decreases the machine weight, which means easier handling on construction sites. The single-phase double-speed motor (230 V) contributes to a longer saw band lifetime, especially for cutting stainless profile materials. The saw is equipped with a high-performance double-speed motor, quick-action vice, and continuous arm turning at a sta-

ble position of the clamped material up to 60°. The saw band downfeed and arm lifting are performed manually.

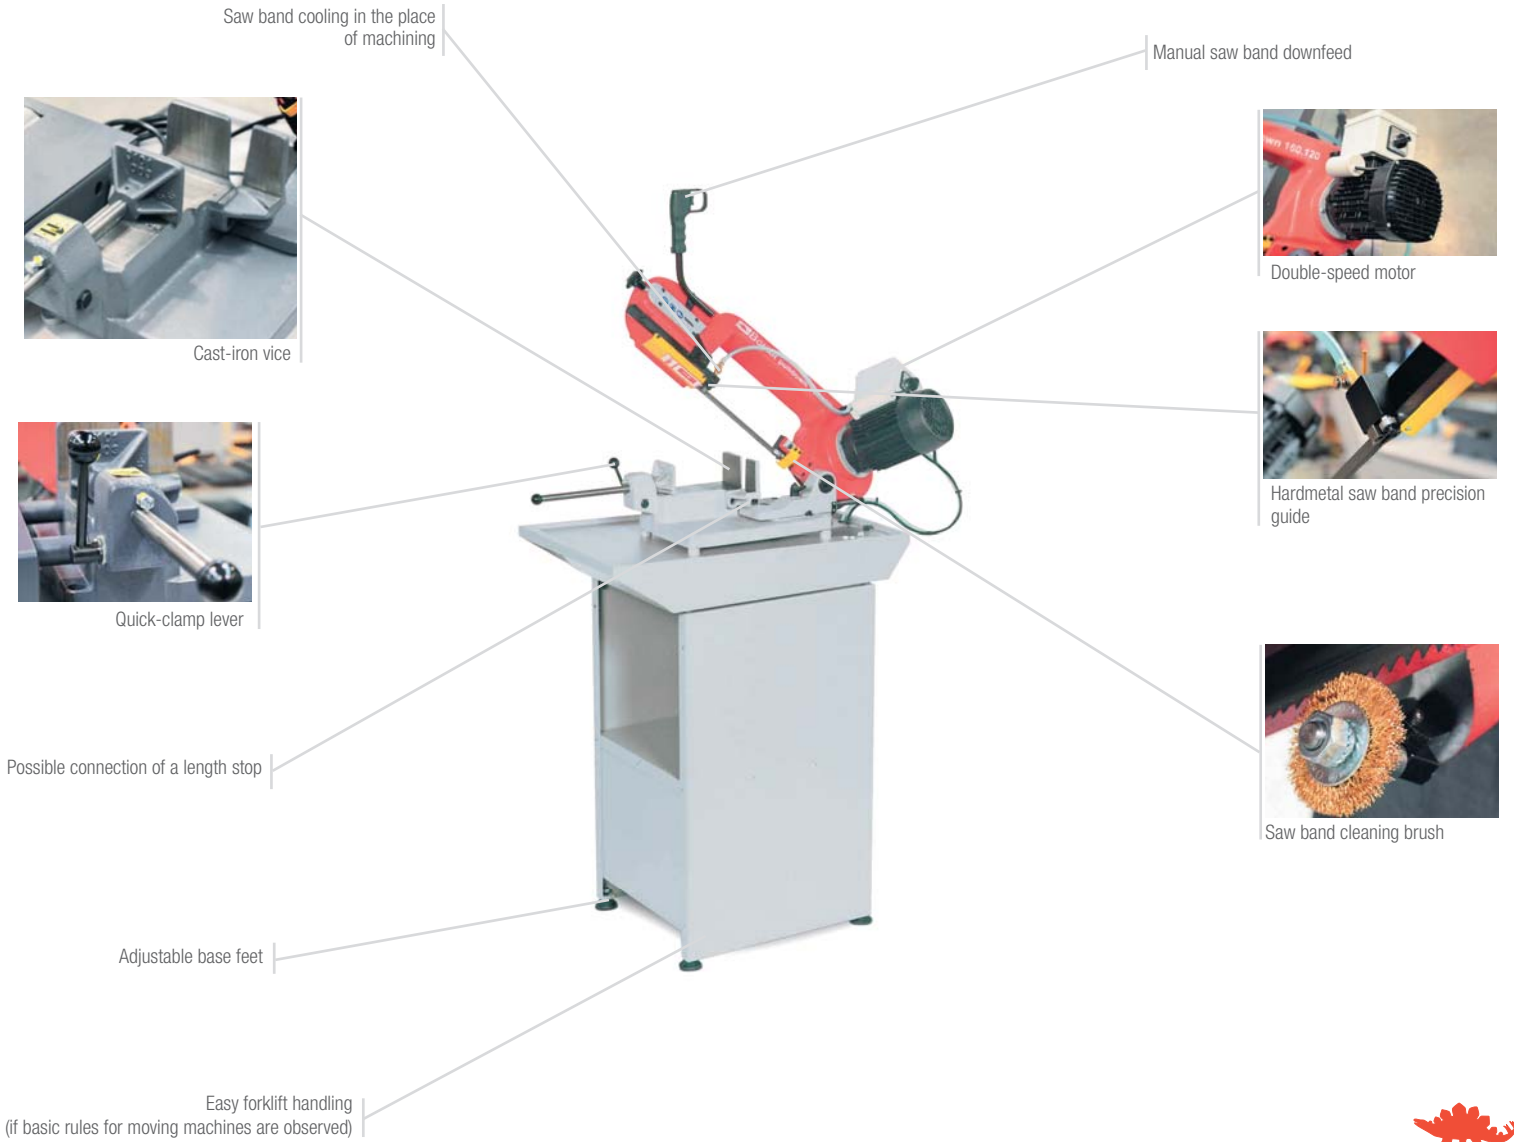

## Pulldown 160.120 G

Pulldown 160.120 G is supplied without the base and cooling. Both the base and the cooling may be purchased additionally.

### Price list

### Cutting parameters

0°	120	160x70	150x120	120	50	50	-
45°R	90	100x90	90x120	90			
60°R	55	55x65	55x65	55			

### Technical data

Working mode ..... manual  
 Mitre cuts range ..... 0° to 60°  
 Drive ..... 0,37 kW, 1x230 V/50 Hz  
 Saw band speed ..... 37 - 70 m/min.  
 Saw band dimensions ..... 1,620x13x0.65 mm  
 Material loading height ..... 90 mm  
 Shortest remainder length ..... 20 mm

### Machine dimensions

Length ..... 380 mm  
 Width ..... 800 mm  
 Height ..... 450 mm  
 Weight ..... 38 kg



With the bearing capacity up to 150 kg/m, a wide range of optional accessories, and connection pieces to BOMAR bandsaws, the "M" System is ideal for handling material in your workshop. Thanks to their default length of 2 and 3 m, roller tracks may be flexibly adjusted to any environment.



Vertical side rollers



Connection of the inlet roller conveyor - detail



Height-adjustable feet

Sample assembly

Ord.Num.	Description	Marking	EUR/pcs
101.001.B4	Pulldown 160.120 G		
253.M232-150-7S2	Roller conveyor - 2m	M230	
253.M232-150-7S2	CNC material length stop	MNCA	
255.001	Connecting part M230		
271.039	Vertical rollers, steel, set 4 pcs	VRM-S	

Innovative accessories

Pulldown 160.120 G bandsaw is supplied with unrivalled complete equipment. With intelligent optional equipment and accessories, the machine may be adapted precisely to individual requirements.



Micro-spray system

For ideal cutting of pipes and profiles, the micro-spray unit applies a grease film on the teeth points and lateral sides of the saw band



Tenzomat

A precise measuring tool for the control of the saw band tension when a new band is installed